



ECLIPSE

Fully Automated Fiber End Face Inspection And Cleaning

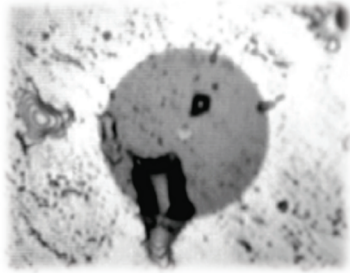

- Lower production costs
- Reduce waste
- Exceed industry standards
- Increase product throughput
- Eliminate operator subjectivity
- Competitive advantage

The Eclipse provides a traceable, auditable electronic record of your product at any point in the supply chain.

Inspection & Cleaning Time/Fiber*	As low as 15 seconds/fiber
Cleaning Method	Dry contact
Cleans/Cartridge	Approximately 600
Connector Types	MT/MTP, SFP, 2.5mm, 1.25mm, SC/ST/FC/E2000, LC/Mu, Lemo, and MIL-38999
Inspection Standards	IPC-8497-1, IEC Standard 61300-3-35, or Customer Defined Criteria
Cleaning Standards	GR-2923-CORE

*Actual time to clean and inspect is dependent on connector type, number of cleans per connector and fiber density.